


# CONVEYOR ROLLER

## Roller for goods transfer

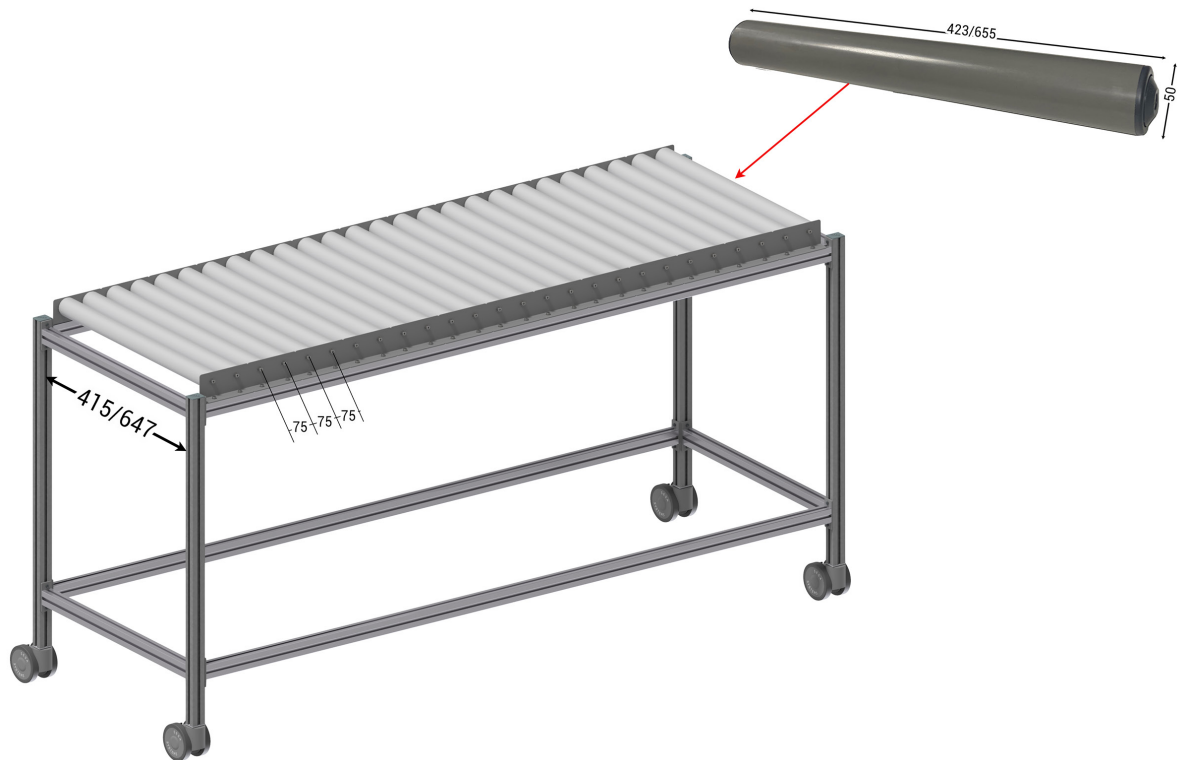


Conveyor rollers are intended to ensure the transfer of boxes or products.

PVC rollers allow smooth and quiet movement. Easily scalable according to your business constraints, which allows you to create conveyors quickly. These devices equipped with rollers allow effortless sliding (instead of carrying the container) to improve working conditions and QVT (Quality of Life at Work).

- Silent PVC roller
- Diameter: 50 mm/1.97 inch
- Center distance between rollers: 75 mm/2.95 inch for plastic bin of minimum L 230 mm/9.05 inch and 150 mm/5.90 inch for plastic bin of minimum L 450 mm/17.72 inch. The support of the body must be effective on three rollers minimum to ensure efficient movement.
- Fixing with 2 brackets on aluminum profile L 415 mm/16.34 inch (code 690108) or L 647 mm/25.48 inch (code 690102)
- Allowable load: 30 kilos for the roll L 423 mm/16.65 inch and 10 kilos per roll L 655 mm/25.79 inch.

Our research and development department is at your disposal to assist you with all your projects.

### Accessories



1

CODE	DESIGNATION	LEAD TIME	PACKING
690551	L 423 mm Ø 50 mm	20 days	In kit
690552	L 655 mm Ø 50 mm	20 days	In kit
690553	Set of 4 brackets for conveyor roller attachment	20 days	In batch

1